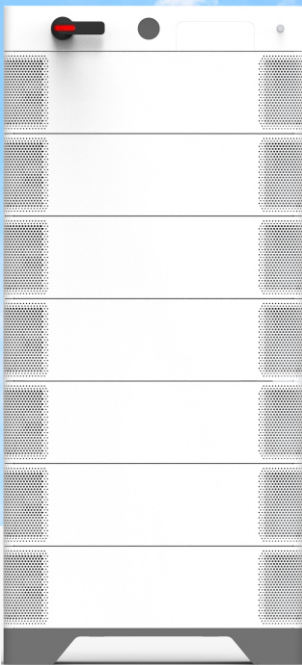


129-200kWh APX Commercial Battery

- Flexible capacity options, 129kWh to 200kWh
- Module level energy optimization
- Support to mix new and old battery modules in one system
- Easy installation with modular and stacked design
- Long lifespan, 10 years warranty









Preliminary Version

GROWATT

www.growatt.com

P O W E R
- I N G O
T O M O -
R R O W O

Datasheet	APX 129.0H-S1	APX 143.3H-S1	APX 157.6H-S1	APX 172.0H-S1	APX 186.3H-S1	APX 200.7H-S1
System demo						
Control module	HVC 1000200-C1					
Number of power modules	1					
Battery module	APX 14.3P-B1					
Battery module energy	14.33kWh					
Number of battery modules	9	10	11	12	13	14
Nominal energy	129.02kWh	143.36kWh	157.69kWh	172.03kWh	186.36kWh	200.70kWh
Rated energy	116.11kWh	129.02kWh	141.92kWh	154.82kWh	167.72kWh	180.63kWh
Max. output power*1	64kW	71kW	78kW	86kW	93kW	100kW
Peak output power	103kW,60s	114kW,60s	126kW,60s	137kW,60s	149kW,60s	160kW,60s
Dimension (W/D/H)/column *2	920/510/1350mm /2	920/510/1485mm /2	920/510/1598mm /2	920/510/1733mm /2	920/510/1846mm /2	920/510/1981mm /2
Weight	1277kg	1412kg	1547kg	1682kg	1817kg	1952kg
Compatible Inverter	WIT 50-100kW/400V series inverter					
Nominal voltage	768V					
Operating voltage range ³	650V~945V					
Output full load voltage range	720V~880V					
Nominal capacity	280AH(@25°C)					
Rated capacity	252AH(@25°C)					
Battery type	Cobalt Free Lithium Iron Phosphate (LFP)					
Ingress protection	IP66					
Installation	Floor installation					
DOD	90%					
Operating ambient temperature	- 10°C~50°C/14°F~122°F					
Relative humidity	5%~95%					
Cooling	Smart air cooling					
Altitude	≤4000m					
Warranty	10 Years					
Control Module	HVC 1000140-C1					
Dimension(W/D/H)	920/510/135 mm					
Weight	25kg					
Communication Port	CAN					
Operating voltage range ³	250V-950V					
Maximum current	200A					
Peak current	224A,60s					
Monitoring parameters	SOC, system voltage, current, cell voltage, cell temperature, PCBA temperature					
	APX 14.3P-B1					
Nominal energy	14.33kWh					
Nominal voltage	80V					
Operating voltage range ³	0-105V					
Dimensions(W/D/H)	920/510/248 mm					
Weight	135kg					
Certification & Licensing	IEC62619(Cell&Pack), IEC60730, VDE2510-50, CE, CEC, RCM, UN38.3, UI1973, UI9540, UL9540A, FCC					

*1 Depend on the max. battery charge/discharge power of the inverter.

*2 Include power module (HVC 1000140-C1)

*3 Floor installation requires extrabase (W*D*H=920/510/110mm)

* APX series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU

* 2023 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.