

Monocrystalline 144 cells

JUPITER




M6 166
9BB



Guaranteed positive output
selection 0 ~ +5 Wp
by single measuring



3.2 mm anti-reflective glass



BLACK | WHITE




Maximum stability through
aluminium soft grip frame



Maximum 5400 Pa snow load



15 years manufacturer's warranty
25 years linear performance guarantee

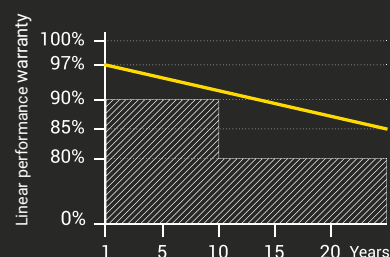

OUTPUT: 450 - 460 WATT

JUPITER monocrystalline 144 halfcut cell series with multibusbar M6 cells is the newest top efficiency series. Halfcut cells are split in two halves to improve the performance and they are arranged in two parallel strings for a better management of shading. Featuring a 40 mm black anodized aluminium frame, JUPITER series can combine high robustness and visual attractiveness to conversion efficiency over 21 %.



power for a better world

STC	A-HCM450/144	A-HCM460/144
Maximum Power (Pmax) (W)	450	460
Open Circuit Voltage (Voc) (V)	50.22	50.70
Short Circuit Current (Isc) (A)	11.48	11.63
Voltage at Maximum Power (Vmpp) (V)	41.40	41.80
Current at Maximum Power (Impp) (A)	10.87	11.01
Module Efficiency (%)	20.70	21.16

Electrical Parameters at NOCT	A-HCM450/144	A-HCM460/144
Maximum Power (Pmax) (W)	334	342
Open Circuit Voltage (Voc) (V)	46.84	47.30
Short Circuit Current (Isc) (A)	9.26	9.40
Voltage at Maximum Power (Vmpp) (V)	38.27	38.64
Current at Maximum Power (Impp) (A)	8.73	8.86

Temperature Characteristics	
Pmax Temperature Coefficients (W / °C)	-0.37 % / °C
Voc Temperature Coefficients (V / °C)	-0.28 % / °C
Isc Temperature Coefficients (A / °C)	+0.05 % / °C
NMOT Nominal Operating Cell Temperature (°C)	45 ±2 °C

Specifications	
Cell Type	Mono M6 166 9BB
Weight	23.5 kg ±3 %
Dimensions	2094x1038x40 mm (±2 mm)
Cable Cross Section Size	4 mm², cable approx 130 cm, QC4 compatible
No. of cells	144 (6x24)
Junction Box	IP67, 3 diodes
Frame	Black anodized aluminium
Front glass	3.2 mm high transmission, low iron, tempered glass

Operating Conditions	
Operating Module Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	30 A
Selection	0 ~ +5 W
Nominal Front Load	5400 Pa
Nominal Rear Load	2400 Pa
Class of Protection	II

Packing Details	
Container Type	40'HC
No. of Pallets	22
Pieces per Pallet	27
Total quantity of modules	594

