

AEG

AEG PREMIUM SERIES



AS-M1443W-BH(M10)/ HV - AS-M1443Y-BH(M10)/ HV
N-TYPE TOPCON BIFACIAL GLASS-GLASS PHOTOVOLTAIC MODULE

TECHNICAL CHARACTERISTICS



Power range: 580-595 Wp
Glass-glass and bifacial, N-Type cell technology
Suitable for: residential / commercial installations
Efficiency up to 23%

EXTRA PEACE OF MIND



Extensive certifications and rigorous Quality Control
30 years product warranty
30 years performance warranty

PRODUCT NAME CODE (PNC)



AS-M1443W-BH(M10)-580/585/590/595/HV
white back side pattern (glazed glass), silver frame
AS-M1443Y-BH(M10)-580/585/590/595/HV
white back side pattern (glazed glass), black frame

ADVANTAGES



Extra converting surface on the module back thanks to bifaciality;
Outstanding sleek optics
Anti reflective coating on front glass of the module
Extra long cables for greater installation flexibility



AS-M1443W-BH(M10) / HV - AS-M1443Y-BH(M10) / HV N -TYPE TOPCON BIFACIAL GLASS-GLASS PHOTOVOLTAIC MODULE

PRODUCT SERIES & NAMECODE (PNC)	
AEG PREMIUM EFFICIENCY SERIES	
AS-M1443W-BH(M10)-580/585/590/595/HV, white back side pattern (glazed glass), silver frame	
AS-M1443Y-BH(M10)-580/585/590/595/HV, white back side pattern (glazed glass), black frame	


CERTIFICATIONS	
System	ISO 9001, ISO 14001, ISO 45001
Product	IEC/EN 61215-1:2016, IEC/EN 61215-1:2016; IEC 61215-2:2016; EN 61215-2:2017; IEC 61730-1:2016 / EN IEC 61730-1:2016; IEC 61730-2:2016 / EN IEC 61730-2:2016

ELECTRICAL CHARACTERISTICS AT STC ^{1,2}					
Nominal Power (Pmax)	[Wp]	580	585	590	595
Power Sorting ³	[W]	0-5	0-5	0-5	0-5
Maximum Power Voltage (Vmp)	[V]	43.11	43.27	43.45	43.61
Maximum Power Current (Imp)	[A]	13.45	13.52	13.58	13.64
Open Circuit Voltage (Voc)	[V]	51.30	51.50	51.70	51.90
Short Circuit Current (Isc)	[A]	14.28	14.36	14.45	14.53
Module Efficiency (ηm)	[%]	22.5	22.6	22.8	23.0
Maximum System Voltage	[V]	1500	1500	1500	1500
Maximum Series Fuse	[A]	30	30	30	30

WARRANTIES		
Product warranty ⁶	[years]	30
Performance warranty (linear) ⁷	[years]	30


TEMPERATURE CHARACTERISTICS		
NMOT	[°C]	41 (±2)
Pmax Temp. Coefficient (γ)	[%/°C]	-0.29
Voc Temp. Coefficient (β)	[%/°C]	-0.25
Isc Temp. Coefficient (α)	[%/°C]	0.043
Operating temperature	[°C]	-40~+85

ELECTRICAL CHARACTERISTICS AT NMOT ⁴					
Maximum Power (Pmax)	[W]	436.2	439.9	443.7	447.4
Maximum Power Voltage (Vmp)	[V]	40.59	40.73	40.89	41.06
Maximum Power Current (Imp)	[A]	10.75	10.80	10.85	10.90
Open Circuit Voltage (Voc)	[V]	48.73	48.92	49.11	49.30
Short Circuit Current (Isc)	[A]	11.53	11.59	11.66	11.73

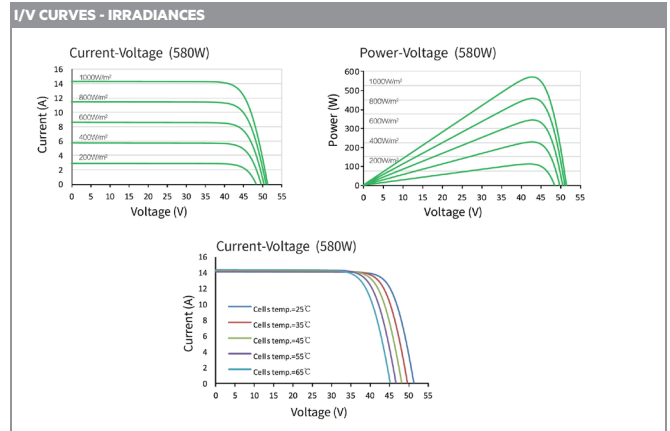

ELECTRICAL SPECIFICATIONS - INTEGRATED POWER / POWER GAIN ⁵					
Bifaciality factor	80 ± 10%				
Pmp Gain		10%	15%	20%	25%
Maximum Power (Pmax)	[W]	638	667	696	725
Maximum Power Voltage (Vmp)	[V]	47.42	50.00	52.00	54.00
Maximum Power Current (Imp)	[A]	15.00	15.50	16.14	17.00
Open Circuit Voltage (Voc)	[V]	56.43	59.00	62.00	64.12
Short Circuit Current (Isc)	[A]	16.00	16.42	17.13	18.00

MECHANICAL CHARACTERISTICS		
Solar cells	monocrystalline [pcs]	144
Dimensions [mm]	M10 Bifacial Half-cut [182 x 91]	
Front glass	high-transparency with anti reflective coating	
	Thickness [mm] / [in]	2 / 0.08
Back glass	White back side pattern (glazed)	
	Thickness [mm] / [in]	2 / 0.08
Encapsulant	EVA	
	transparent	
Frame	Anodized aluminum alloy	
	Silver or Black	
Junction box	Split-type, IP68	
	Bypass diodes	3
UV-resistant cables	Length [mm] / [in]	
	1650/55.12	
Connectors	MC4 Original	
Dimensions	H x L x W [mm]	
	2278 x 1134 x 30	
	H x L x W [in]	
	89.68 x 44.65 x 1.18	
Weight	[kg] / [lbs]	
	32.1 / 70.76	
Maximum load	Wind / Snow [Pa]	
	2400 / 5400	
Fire Class	Class A	

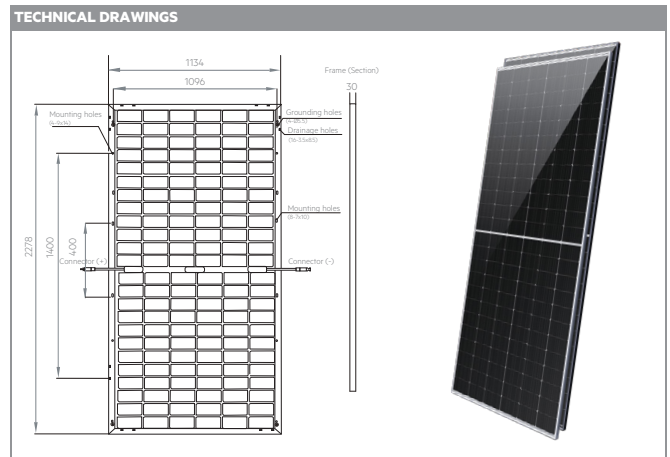

PACKAGING		
Packing configuration	[pcs/pallet]	36
Loading capacity	[pcs/40 ft container]	720

NOTES	
1-Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25°C	
2-Measurement tolerances (IEC 61215:2016): Pmax±3.0%, Voc±3.0%, Isc±5%	
3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power	
4-NMOT: Nominal module operating temperature, Irradiance 800 W/m², Wind Speed 1m/s; Ambient Temperature 20°C, Air Mass AM=1.5	
5-Electrical characteristics with different rear power gain. Reference to 580 W	
6-Full text of the Warranty Terms available at: www.aeg-solar.com	
7-(PRE/GG) No less than 99% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.4% per year thereafter, ending with 87.4%.	
Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (±0.079") / Version 2024.01.V1.EN © Solar Solutions Group. Specifications in this datasheet are subject to change without notice.	
AEG is a registered trademark used under license from AB Electrolux (publ).	

CONTACT US
info@aeg-solar.com | www.aeg-solar.com

AEG is a registered trademark used under license from AB Electrolux (publ).