


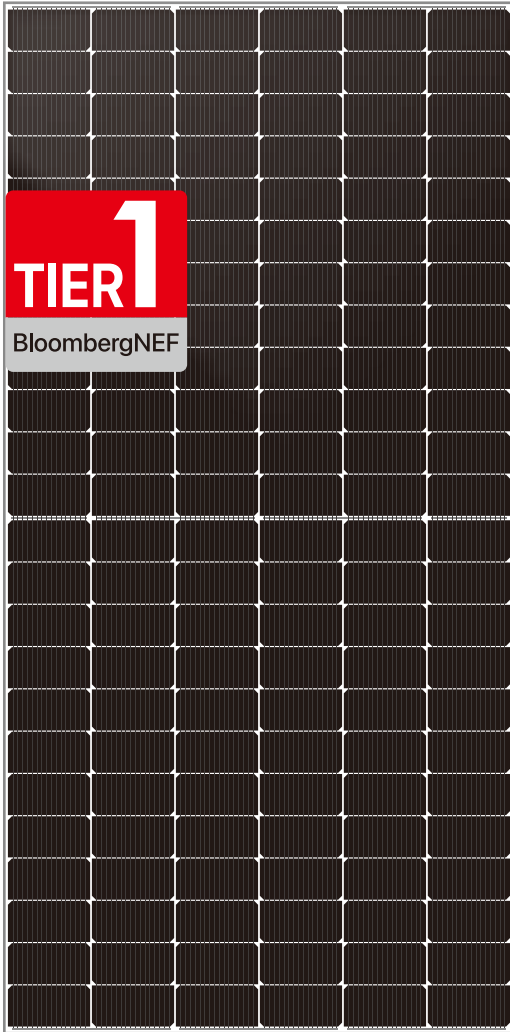

TOPCon

DHN-72X16/DG

0~+5W

570~585W



Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



Higher Power Output

Bifacial module back-side power increases 5-25%



Lower Degradation Rate, PID Resistance

First-year ≤1%, 2-30 year ≤0.4%; excellent Anti-PID performance



Lower Temp. Coefficient

More power generation under high-temperature



Better Dim Light Performance

Excellent performance under dim light

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



Quality Guarantee

15-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

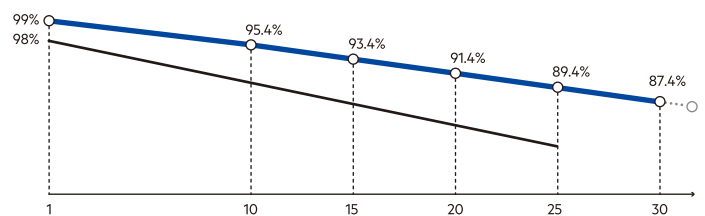

▲ DAH Solar Linear power output guarantee ▲ Standard Linear power output guarantee

Mechanical Specification

Cable	4.0mm ² , 350/250mm in length, (Including Connector) length can be customized
No. of Cells	144 (6×24)
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	32kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	2279×1134×30mm
Packing	36pcs/Pallet, 720pcs/40HQ

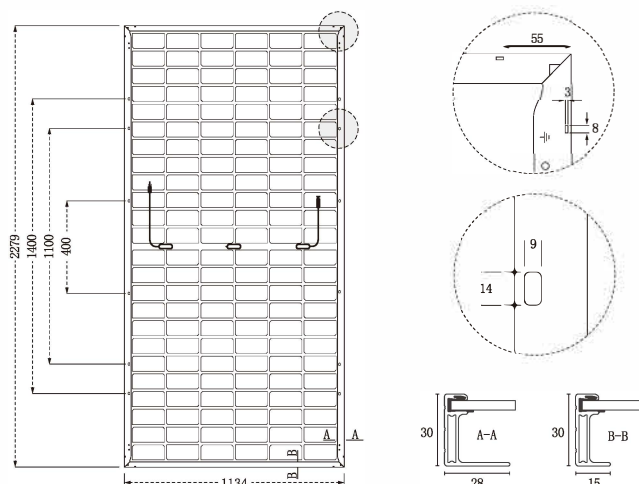

Electrical Characteristics

Module Type									
DHN-72X16/DG									
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
Maximum Power (P _{max})	570	429	575	432	580	436	585	440	
Open-circuit Voltage (V _{oc})	51.0	48.5	51.2	48.6	51.4	48.8	51.6	49.0	
Maximum Power Voltage (V _{mp})	43.2	41.0	43.4	41.2	43.6	41.4	43.8	41.6	
Short-Circuit Current (I _{sc})	14.02	11.32	14.08	11.37	14.14	11.42	14.20	11.46	
Maximum Power Current (I _{mp})	13.19	10.44	13.25	10.49	13.30	10.53	13.36	10.57	
Module Efficiency (STC)	22.06%		22.25%		22.44%		22.64%		
Refer Bifacial Factor	80±5%		80±5%		80±5%		80±5%		

STC: Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT: Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (P _{max})	599	604	609	614.25
	Module Efficiency (%)	23.16	23.36	23.56	23.77
15%	Maximum Power (P _{max})	656	661	667	673
	Module Efficiency (%)	25.36	25.59	25.81	26.03
25%	Maximum Power (P _{max})	713	719	725	731
	Module Efficiency (%)	27.57	27.81	28.05	28.29

Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A


Temperature Coefficient

Temperature Coefficient of I _{sc} (α I _{sc})	0.046%/°C
Temperature Coefficient of V _{oc} (β V _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (γ P _{mp})	-0.30%/°C

Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

I-V Curve

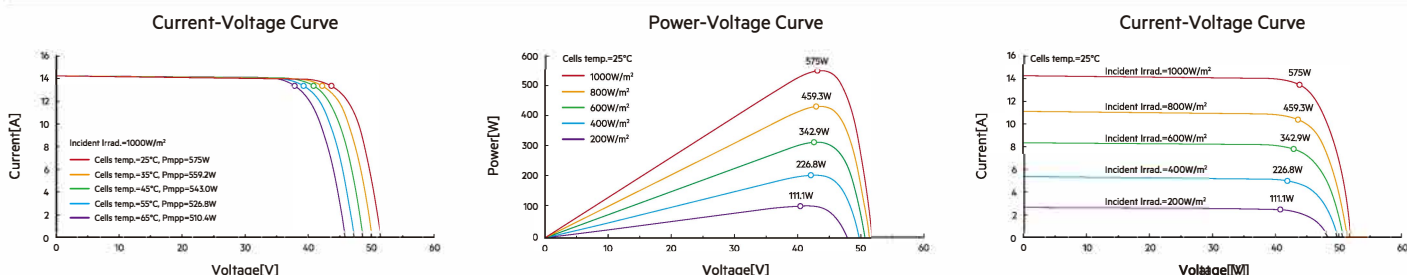

DAH Solar Co., Ltd.

Add: No.1 Yaoyuan Road, Luyang District, Hefei City, Anhui, China

Facebook: www.facebook.com/DAHsolar

E-mail: sales@dh-solar.cn

Q www.dahsolarpv.com