



# Neostar 2S


Mono-Glass Module

## 440W-460W

Second Generation  
Comprehensive Upgrade:

 **Partial Shading Optimisation**

 **Better Temperature Coefficient**


 **High Temperature Restriction**

 **Micro-crack Resistance**

 **Higher Power**

 **Lower BOS**

 **Full Black Design**

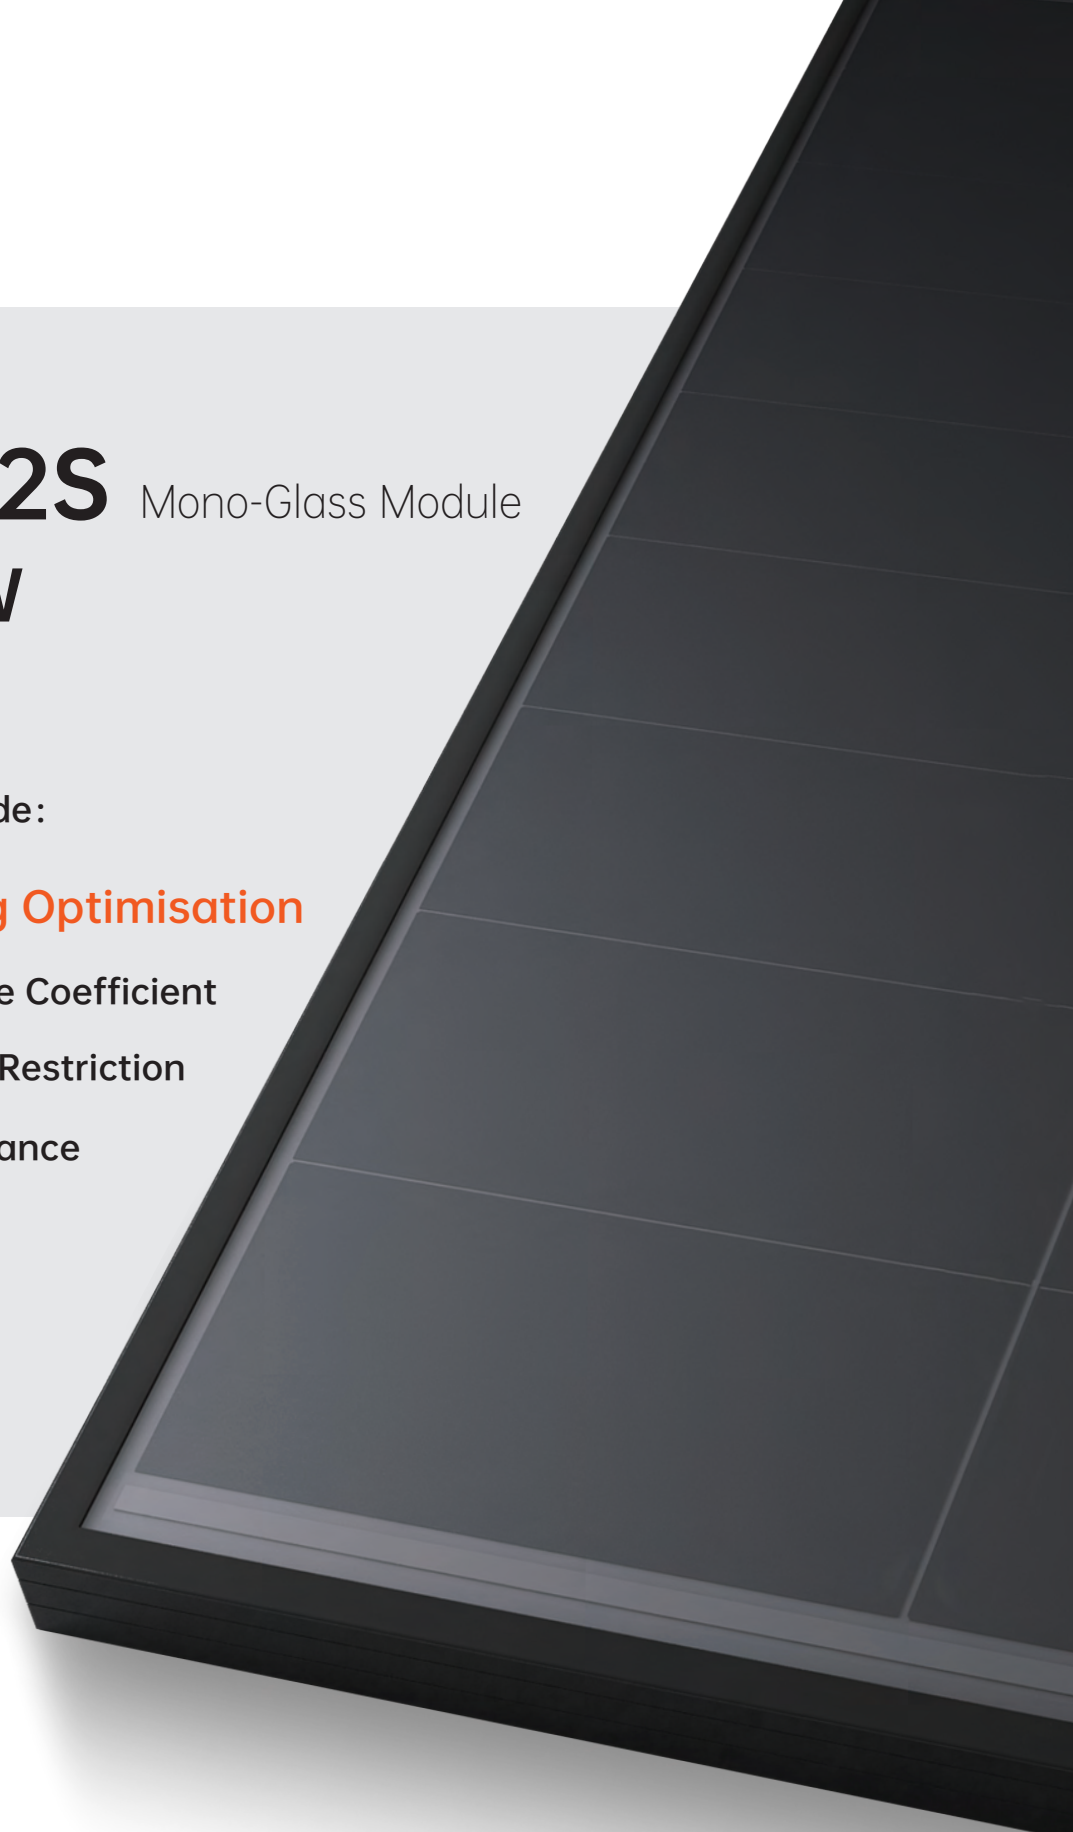

Product  
Warranty



Performance  
Warranty



reddot winner 2023





Munich RE 

**460W**  
Output

**23.1%**  
Efficiency

**≤1%**  
First-year Degradation

**≤0.35%**  
Annual Degradation from Year 2-30

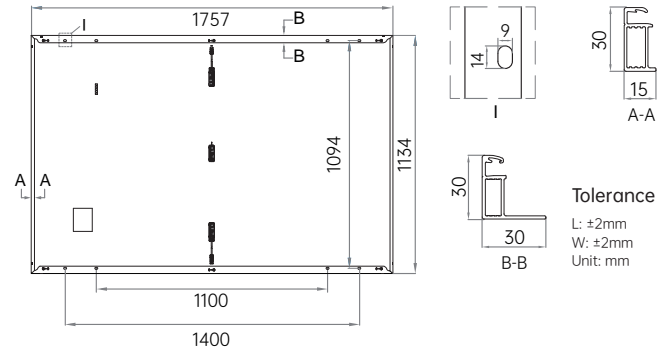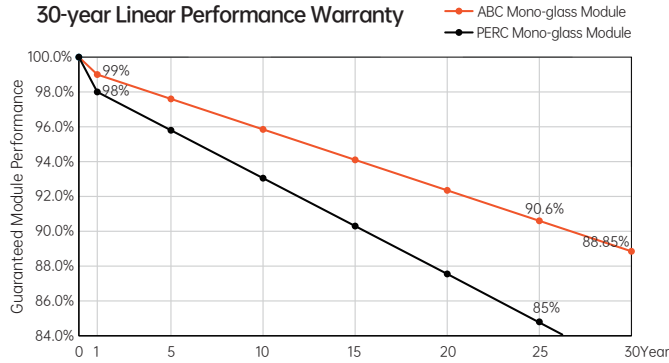

## Electrical Characteristics (STC: AM1.5 1000W/m<sup>2</sup> 25°C NOCT: AM1.5 800W/m<sup>2</sup> 20°C 1m/s)

Power Tolerance: 0~ +3%

Module Type	AIKO-A440-MAH54Mb		AIKO-A445-MAH54Mb		AIKO-A450-MAH54Mb		AIKO-A455-MAH54Mb		AIKO-A460-MAH54Mb	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P <sub>max</sub> [W]	440	331	445	335	450	339	455	343	460	346
V <sub>oc</sub> [V]	40.49	38.24	40.59	38.33	40.69	38.43	40.79	38.52	40.89	38.62
V <sub>mp</sub> [V]	33.50	31.64	33.60	31.73	33.70	31.83	33.80	31.92	33.90	32.02
I <sub>sc</sub> [A]	13.91	11.25	14.02	11.33	14.12	11.42	14.22	11.50	14.32	11.58
I <sub>mp</sub> [A]	13.14	10.49	13.25	10.57	13.36	10.66	13.47	10.75	13.57	10.83
<b>Module Efficiency</b>	<b>22.1%</b>		<b>22.3%</b>		<b>22.6%</b>		<b>22.8%</b>		<b>23.1%</b>	

## Mechanical Specification

Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Black anodized aluminum
Cable	4mm <sup>2</sup> (IEC) 12AWG(UL) 1200mm
No. of Cells	108(6*18)
Junction Box	IP68,3 bypass diodes
Connector	MC4-Evo2
Weight	21.5kg
Dimension	1757*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

## Temperature Ratings (STC)

Temperature Coefficient of I <sub>sc</sub>	+ 0.05%/ °C
Temperature Coefficient of V <sub>oc</sub>	- 0.22%/ °C
Temperature Coefficient of P <sub>max</sub>	- 0.26%/ °C

## Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V <sub>oc</sub> and I <sub>sc</sub> Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com  
marketing@aikosolar.com