





LEAPTON
SOLAR

Monofacial

Bifacial

LP182*199-M-66-NB N-Type TOPCon Dual Glass

Rated Power 560-585W

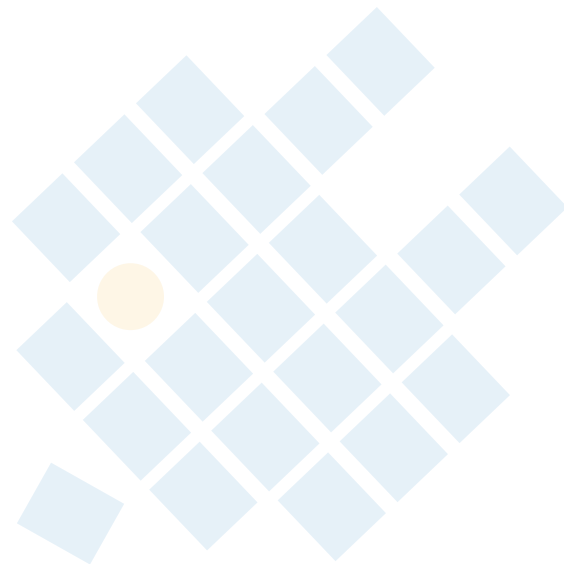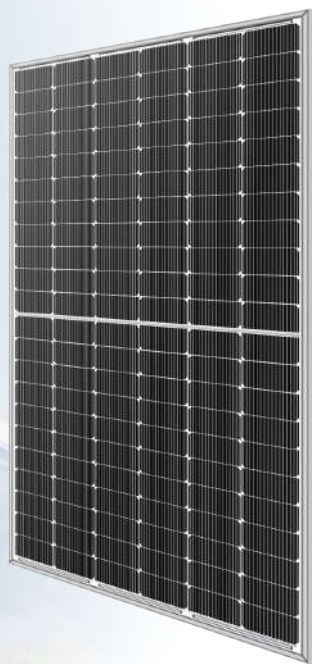

N-Type MBB Cell

New circuit design N-type cells, can increase the output power of 10W~20W



Bifacial with dual glass

Module adopts 182*199mm half cells, bifacial module provide an additional 5%~25% output.



Harsh Environmental Adaptability

Strict salt spray and ammonia corrosion test by TUV Nord.



Low Light Features

Higher performance under low light environment.



PID Protection

Ensure the attenuation probability caused by PID phenomenon is minimized.




Load Capacity

Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

Leapton Energy N-Type Linear Power Warranty Industry Warranty

0.4% Annual Degradation over 30 years

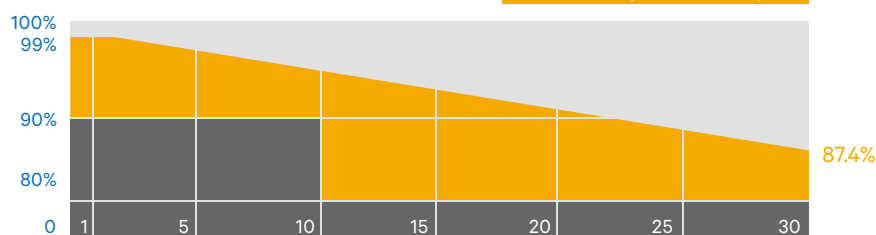

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Leapton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182


www.leaptonenergy.jp

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

MECHANICAL DIAGRAMS

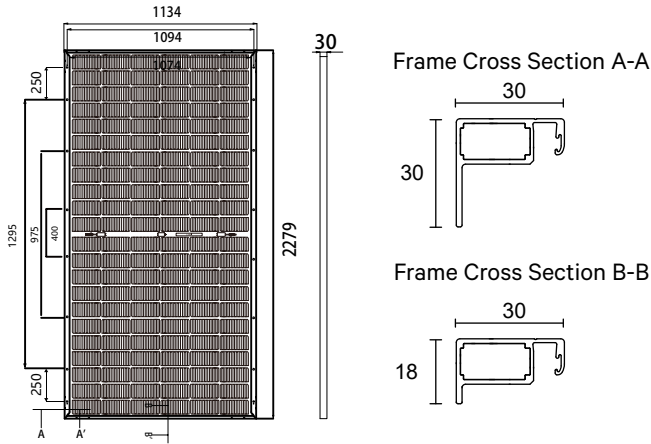

SPECIFICATIONS

Weight	32kg
Dimensions	2279mm*1134mm*30mm
Cell Dimensions	182*199mm
Cell Amount	66*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm ² , N 1400mm/P 1400mm for Horizontal installation 4mm ² , N 300mm/P 300mm for Vertical installation
Connector	MC4 compatible
Application Level	Class A
Bifaciality	80±5%

ELECTRICAL PARAMETERS AT STC

Power	560W	565W	570W	575W	580W	585W
Open Circuit Voltage	47.42V	47.62V	47.82V	48.02V	48.22V	48.42V
Short Circuit Current	15.00A	15.07A	15.12A	15.17A	15.22A	15.27A
Maximum Power Voltage	39.51V	39.71V	39.91V	40.11V	40.31V	40.51V
Maximum Power Current	14.17A	14.23A	14.28A	14.34A	14.39A	14.44A
Module Efficiency	21.67%	21.86%	22.06%	22.25%	22.44%	22.64%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	421W	471W	429W	433W	437W	440W
Open Circuit Voltage	45.04V	45.24V	45.44V	45.64V	45.84V	46.04V
Short Circuit Current	12.01A	12.07A	12.13A	12.19A	12.23A	12.25A
Maximum Power Voltage	36.84V	37.04V	34.24V	37.44V	37.64V	37.84V
Maximum Power Current	11.43A	11.48A	11.52A	11.57A	11.61A	11.63A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

ELECTRICAL PARAMETERS (AT 10% BIFACIAL POWER OUTPUT)

Output Power	616W	622W	627W	633W	638W	643W
Open Circuit Voltage	48.42V	47.62V	47.82V	48.02V	48.22V	48.42V
Short Circuit Current	16.52A	16.61A	16.67A	16.74A	16.81A	16.85A
Maximum Power Voltage	39.51V	39.71V	39.91V	40.11V	40.31V	40.51V
Maximum Power Current	15.59A	15.66A	15.71A	15.78A	15.83A	15.87A


TEMPERATURE CHARACTERISTICS

NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

PACKING CONFIGURATION

Modules/Pallet	36 Pieces	Modules/40'Container	720 Pieces
Packing Description	20 Pallets, Total=(36+36)x10=720 Pieces		

CHARACTERISTICS

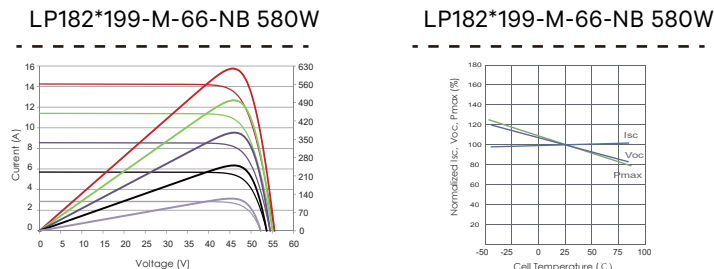

MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A

