

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



String combiner box (SCB); MPP voltage: 1000 V DC; number of strings: 3; Identical number of input and output strings; number of supported MPP trackers: 1; surge protection: T1 / T2; equipment: without special equipment; type of cable entry: Cable gland

## Product description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. The main tasks of the SCBs are the surge protection of the photovoltaic system, collecting strings (if necessary), and looping through the protective equipotential bonding conductor for the local equipotential bonding.

Further functions are optional and depend on the equipment.

Examples of optional functions include protecting the strings with string fuses and disconnecting the strings via DC switch disconnectors or DC fire department switches.

You can determine the full scope of functions of the SCB from its item designation (see the application note for the type key of the SCB, which can be downloaded in the "Downloads" area).

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1197151       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Product key                          | DTHTAA        |
| GTIN                                 | 4063151256753 |
| Weight per piece (including packing) | 2,332.1 g     |
| Weight per piece (excluding packing) | 2,246 g       |
| Country of origin                    | DE            |

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

## Technical data

### Notes

#### Note on connection (strings)

|                     |                                                                                                                                                                                                                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on connection | Identical number of input and output strings                                                                                                                                                                                                                                                      |
| Order information:  | PV fuses are not installed in the SCB, although it would be technically possible to connect more than 2 parallel PV strings.<br>• Check whether additional protection using PV fuses is required in your specific application to ensure the safety and conformity to standards of the connection. |

### Product properties

|        |                           |
|--------|---------------------------|
| Design | without special equipment |
|--------|---------------------------|

#### Insulation characteristics

|                  |    |
|------------------|----|
| Protection class | II |
|------------------|----|

### Electrical properties

#### General

|                               |                |
|-------------------------------|----------------|
| MPP voltage $U_n$             | max. 1000 V DC |
| Open-circuit voltage $U_{OC}$ | max. 1100 V DC |
| Current per string $I_{max}$  | max. 25 A      |
| Total current per MPP tracker | max. 75 A      |

#### Surge protection

|                                                      |               |
|------------------------------------------------------|---------------|
| EN type                                              | T1 / T2       |
| IEC test classification                              | T1 / T2       |
| Protection level $U_p$                               | $\leq 3.5$ kV |
| Total discharge current $I_{Total}$ (10/350) $\mu s$ | 5 kA          |
| Total discharge current $I_{Total}$ (8/20) $\mu s$   | 40 kA         |
| Short-circuit current rating $I_{SCPV}$              | 75 A          |

### Input data

#### DC

|                                  |                     |
|----------------------------------|---------------------|
| Number of inputs (Strings)       | 3 (Per MPP tracker) |
| Number of supported MPP trackers | 1                   |

### Output data

#### DC

|                                            |                     |
|--------------------------------------------|---------------------|
| Number of outputs (MPP tracker)            | 1                   |
| Number of outputs ( $\pm$ per MPP tracker) | 3 (Per MPP tracker) |

### Connection data

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

## DC input

|                           |                                          |
|---------------------------|------------------------------------------|
| Type of cable entry       | Cable gland                              |
| Connection method         | Push-in connection                       |
| Cable cross-section range | 4 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| External cable diameter   | 5 mm ... 10 mm                           |

## Lightning protection equipotential bonding & ground conductor

|                         |                       |
|-------------------------|-----------------------|
| Type of cable entry     | Cable gland           |
| Connection method       | Screw connection      |
| Cable cross section     | 2x 16 mm <sup>2</sup> |
| External cable diameter | 2x 6 mm ... 12 mm     |

## DC output

|                           |                                          |
|---------------------------|------------------------------------------|
| Type of cable entry       | Cable gland                              |
| Connection method         | Push-in connection                       |
| Cable cross-section range | 4 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| External cable diameter   | 5 mm ... 10 mm                           |

## Dimensions

### Housing

|        |        |
|--------|--------|
| Width  | 254 mm |
| Height | 180 mm |
| Depth  | 111 mm |

## Material specifications

|                     |                             |
|---------------------|-----------------------------|
| Material Housing    | Polycarbonate               |
| Material Cover/door | Polycarbonate (transparent) |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP65             |
| Ambient temperature (operation) | -20 °C ... 55 °C |

## Standards and regulations

|                          |                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------|
| Standard designation     | Low-voltage switchgear and controlgear assemblies - Part 2: Power switchgear and controlgear assemblies |
| Standards/specifications | EN 61439-2                                                                                              |

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)




1197151

<https://www.phoenixcontact.com/us/products/1197151>

## Drawings

Dimensional drawing

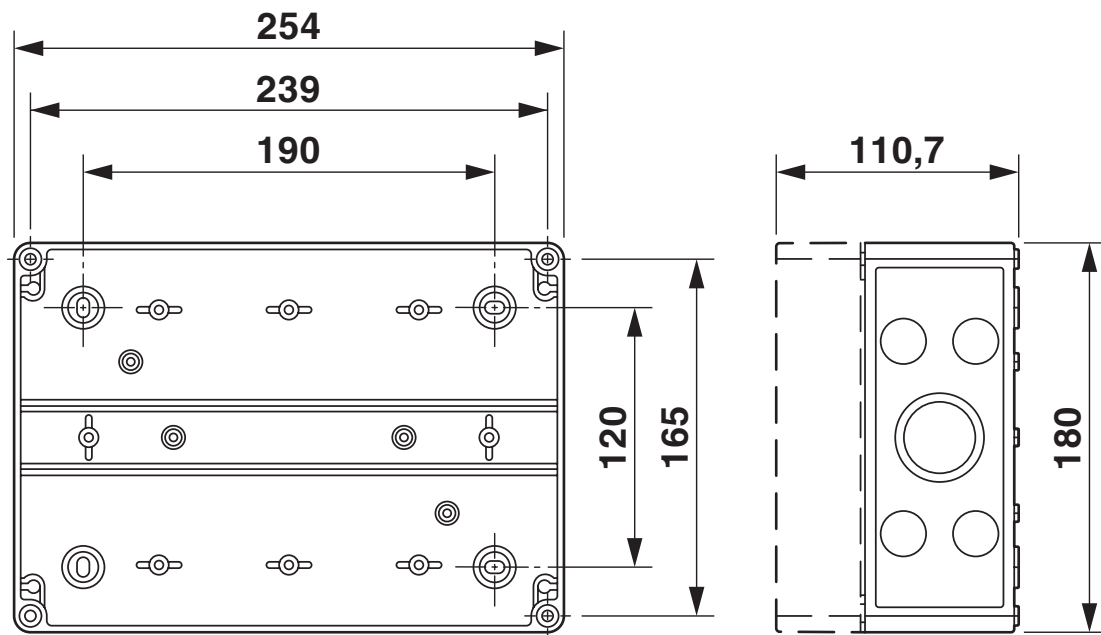

Housing dimensions


# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)

1197151

<https://www.phoenixcontact.com/us/products/1197151>

Connection diagram

## SPD1

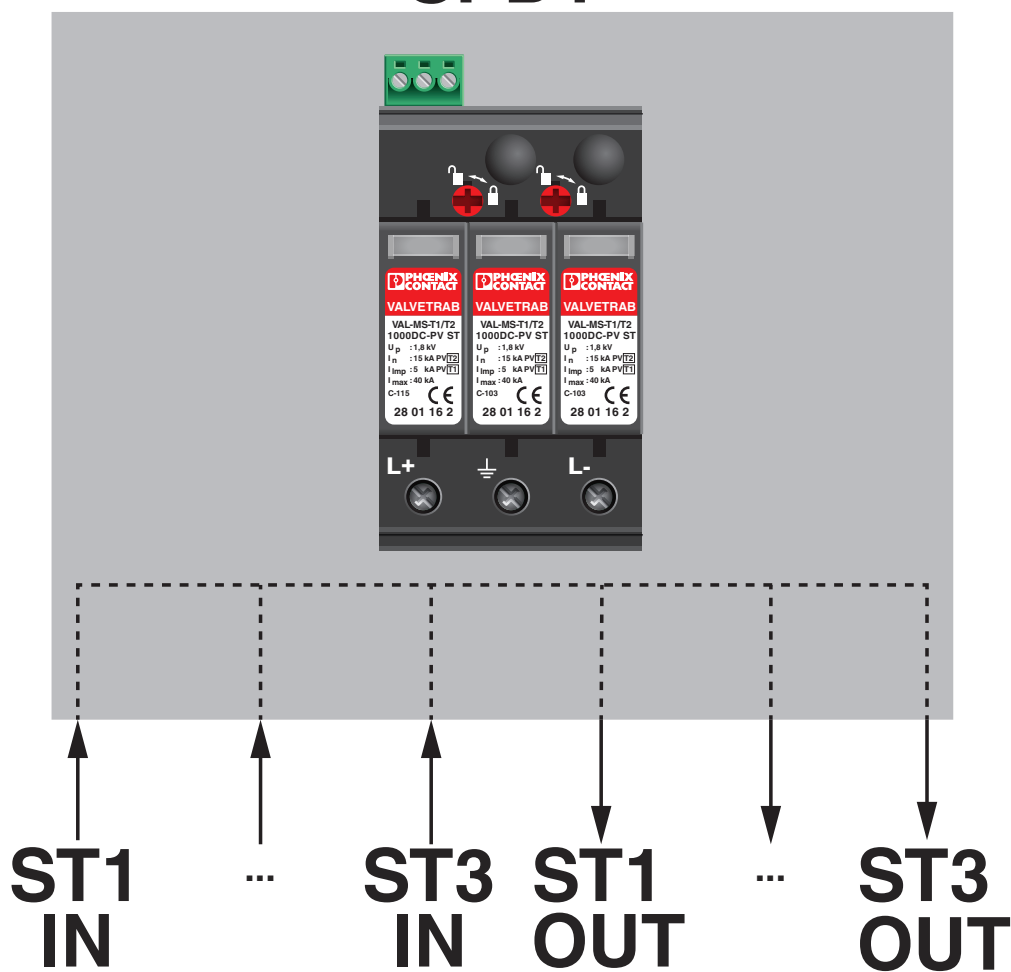

Schematic application drawing


# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

Schematic diagram

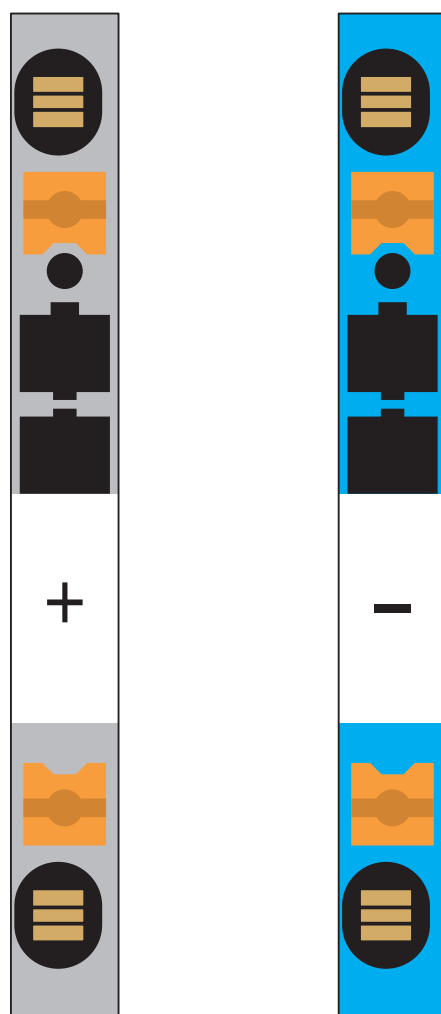

Connection of the PV strings, as well as connection to the inverter


# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

Schematic diagram

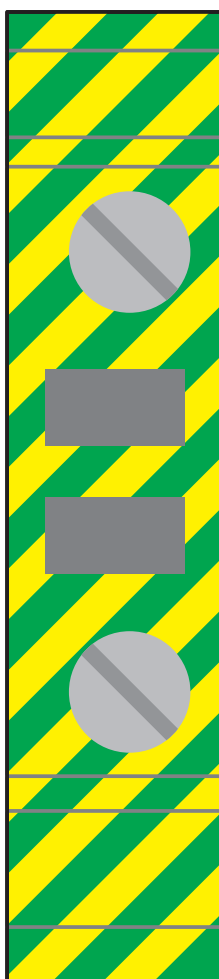



Connection of the protective grounding conductor

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)

1197151

<https://www.phoenixcontact.com/us/products/1197151>

Schematic diagram

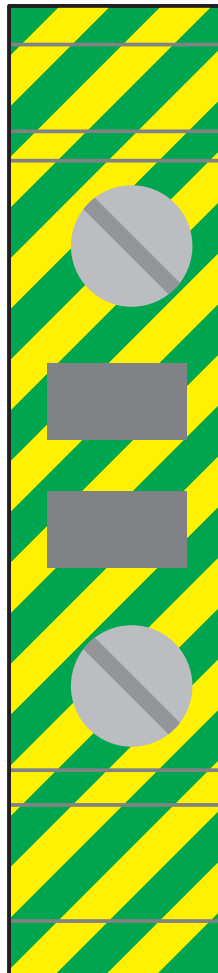

Connection of the protective equipotential bonding conductor

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)


1197151

<https://www.phoenixcontact.com/us/products/1197151>



Connection of the remote indication contact on the surge protection

Schematic diagram

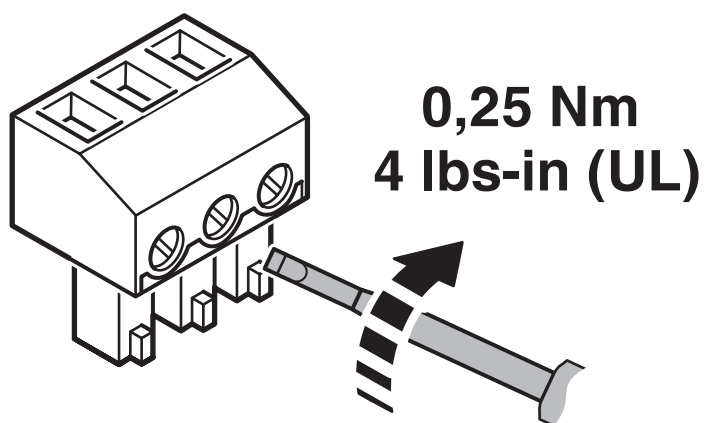

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151  
<https://www.phoenixcontact.com/us/products/1197151>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27171490 |
| ECLASS-15.0 | 22570203 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC003857 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121100 |
|-------------|----------|

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

## Accessories

### SOL-WR-2518-AISI304 - Weather protection cover

1579290

<https://www.phoenixcontact.com/us/products/1579290>



Canopy to protect the string combiner box (SCB) from environmental influences when installed outdoors, made of stainless steel, with M8 grounding bolt on the back, incl. mounting material for SCB and grounding cable.

---

### VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

<https://www.phoenixcontact.com/us/products/2801162>



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

# SOL-SC-3ST-0-DC-1MPPT-1005EQ - String combiner box (SCB)



1197151

<https://www.phoenixcontact.com/us/products/1197151>

## SEALING PLUG 8X16 RD - Sealing plug

1400257

<https://www.phoenixcontact.com/us/products/1400257>

Sealing plug, color: red



## TOOL-KIT SOLAR - Tool set

1212071

<https://www.phoenixcontact.com/us/products/1212071>



**Tool case**, equipped with: crimping pliers, pressing dies for MC3, MC4 and SOLARLOK connectors, stripping tool for commercially available solar cables, stripping tool for SUNCLIX, VDE cable cutter, VDE screwdriver: PH1, PH2, 0.6x3.5 and 0.8x4.0 slots.

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)